


SURFACE MOUNTED LED WALL LIGHTS

- Input voltage: 240V AC
- Wattage: 2.4W
- 12pcs SMD5050 LED chips
- Die cast aluminium matt black or silver
- Internal LED driver included
- Not suitable for dimming
- Mounting U bracket: 113x30mm

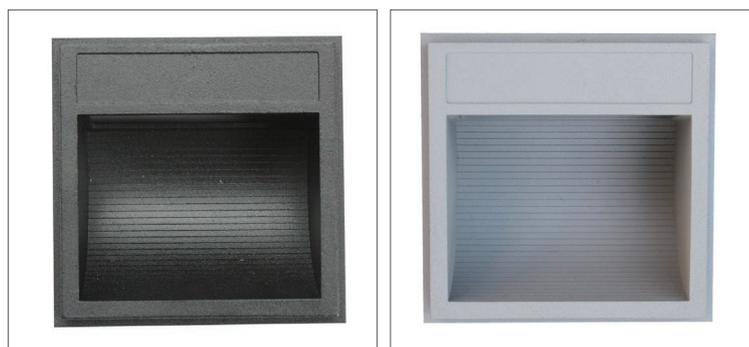

▲CLA4136


▲CLA4186

30,000 HRS

BEAM 80°

IP 65


3 YEAR WARRANTY



CODE	DESCRIPTION	TECHNICAL DATA				DIMENSIONS		
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	WIDTH (mm)	DEPTH (mm)	CARTON QTY
CLA4136W	LED S/M WALL LIGHT MATT BLK SQ 3000K	3000	170	2.4	75	120x120	60	1/20
CLA4136C	LED S/M WALL LIGHT MATT BLK SQ 5000K	5000	170	2.4	75	120x120	60	1/20
CLA4186W	LED S/M WALL LIGHT SIL SQ 3000K	3000	170	2.4	75	120x120	60	1/20
CLA4186C	LED S/M WALL LIGHT SIL SQ 5000K	5000	170	2.4	75	120x120	60	1/20

SURFACE MOUNTED LED WALL LIGHTS

- Input voltage: 240V AC
- Wattage: 1.8W
- 9pcs SMD5050 LED chips
- Die cast aluminium matt black or silver
- Internal LED driver included
- Not suitable for dimming
- Mounting u bracket: 225x30mm



▲CLA4536

▲CLA4586

30,000 HRS

BEAM 70°

IP 65

3 YEAR WARRANTY

CODE	DESCRIPTION	TECHNICAL DATA				DIMENSIONS		
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	HEIGHT (mm)	WIDTH (mm)	CARTON QTY
CLA4536W	LED S/M WALL LIGHT MATT BLK RECT 3000K	3000	130	1.8	75	210	82	1/20
CLA4536C	LED S/M WALL LIGHT MATT BLK RECT 5000K	5000	130	1.8	75	210	82	1/20
CLA4586W	LED S/M WALL LIGHT SIL RECT 3000K	3000	130	1.8	75	210	82	1/20
CLA4586C	LED S/M WALL LIGHT SIL RECT 5000K	5000	130	1.8	75	210	82	1/20

UPDATED ON 02.12.2016