

# SHOP LIGHTER

## RECTANGULAR GIMBAL LED SHOP DOWNLIGHTS


### PRODUCT FEATURES

- Input voltage: SHOP4A,6A: 185-260 AC 50/60Hz  
SHOP8A: 110-265V AC 50/60Hz  
SHOP9: 220-240V AC 50/60Hz
- Wattage: 38W & 40W
- Life time: SHOP4A-8A: 50,000hrs  
SHOP9: 30,000hrs
- Power factor:  $\geq 0.9$
- LED Chips: SMD2835
- Faceplate, heatsink & bracket: aluminium
- Diffuser: glass
- Flex & plug: 1500mm
- Adjustable angle: SHOP4A & 9:  $60^\circ$   
SHOP6A, 8A:  $85^\circ$
- Ambient Temp: SHOP4A-6A:  $-20$  to  $50^\circ\text{C}$   
SHOP7A-9:  $-20$  to  $45^\circ\text{C}$
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with microwave & PIR sensors




### APPLICATIONS


Suitable for use in museums, supermarkets, shopping malls and hotels.

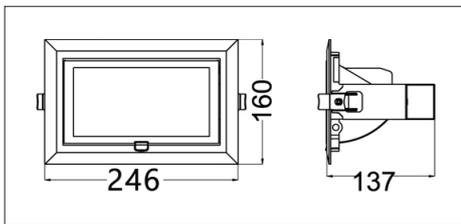

SHOP4A, 6A

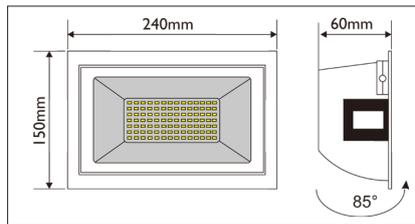

SHOP8A

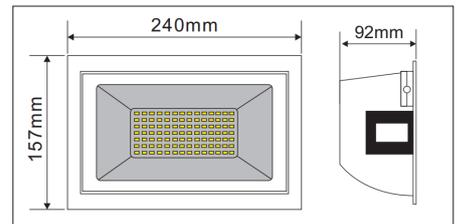

SHOP9

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	IP	SIZE (mm)	CUTOUT (mm)	WEIGHT (kg)	BOX (cm)	CARTON QTY
SHOP4A	D/L LED SHOP GIMBAL WH RECT	3000	3460	38	>80	IP20	246x160x137	230x133	2.1	29x19x18	8
SHOP6A	D/L LED SHOP GIMBAL WH RECT	5000	3780	38	>80	IP20	246x160x137	230x133	2.0	29x20x18	8
SHOP8A	D/L LED SHOP GIMBAL WH RECT	5000	3601	40	>80	IP40	240x150x60	230x127	2.0	29x12x20	8
SHOP9 <sup>New</sup>	D/L LED SHOP GIMBAL WH RECT	4000	3800	40	>82	IP20	240x157x92	230x127	1.7	29x20x13	5

UPDATED ON 17.10.2018

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting