



240V				CRI(Ra) >82	POWER FACTOR 0.86				
							8W	12W	

Slim and compact trade quality downlight that can provide a remarkable light from its wide angled diffused beam.


FEATURES

- Rated for IC Abutted and Covered usage to allow for covering with thermal insulation.
- Fixed head downlight.
- Die-cast aluminium body.
- Aluminium IC cover on 12W model .
- Polycarbonate optical diffuser.
- Wide 80 degree beam angle.
- High efficiency LED SMD Array.
- SAA approved with integrated dimmable LED driver.
- Long lasting up to 30,000 hours¹.
- 0.8m flex & plug fitted.
- IP20 indoor use only.
- 3 Year Warranty.

MAIN APPLICATIONS

All interior residential rooms.

MODEL NO.	WATTAGE (W)	LUMINOUS FLUX (lm)	COLOUR TEMP (K)	FITTING COLOUR
19046/05	8	600	3000	WHITE
19047/05	8	620	4200	WHITE
18788/05	12	800	3000	WHITE
18788/13	12	800	3000	BRUSHED NICKEL
18789/05	12	850	4200	WHITE
18789/13	12	850	4200	BRUSHED NICKEL

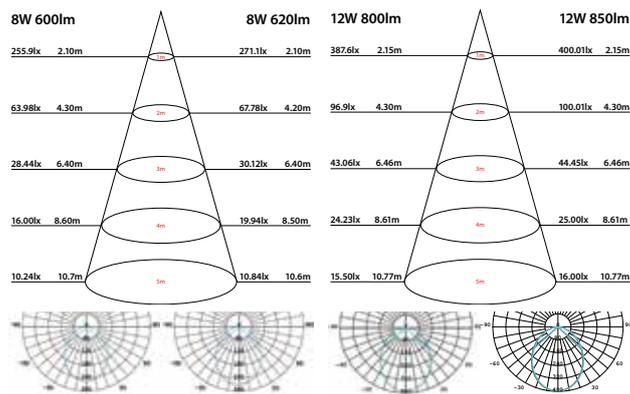

¹ Actual life may vary depending on individual circumstances.